marantz®

Integrated Amplifier   HD-AMP1

Quick Start Guide

Before you begin

What's In The Box

HD-AMP1	Power cord	Remote and batteries	Product manual on CD-ROM	USB cable

Required For Setup

Speakers	Speaker cable

Optional

PC or MAC	iPod/iPhone and USB cable

- For more information, visit www.marantz.com
- Refer to the enclosed CD-ROM manual or Online Manual for other functions information and operation procedure details.
 manuals.marantz.com/HDAMP1/NA/EN/

FC

Product Name : Integrated Amplifier
Model Number : HD-AMP1

1. Connection

1 Connect the left and right speakers

3/8 inch
(10 mm)

R

L
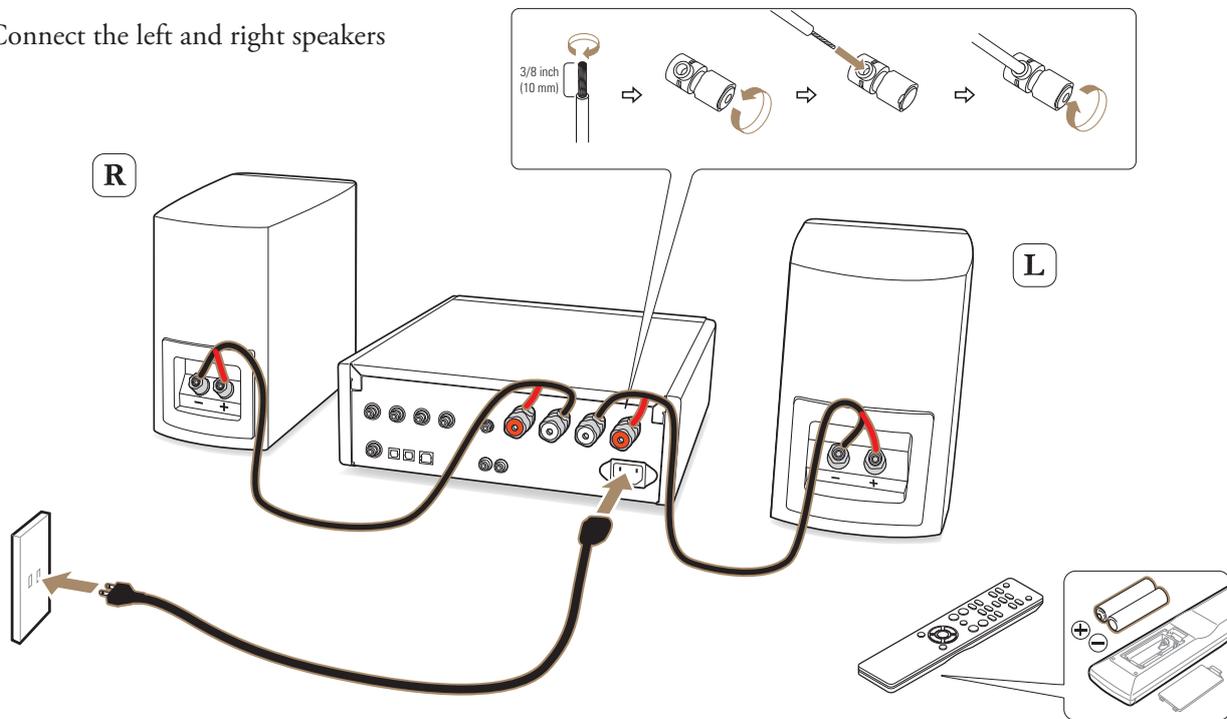
2 Connect the power cord from the HD-AMP1
to a power outlet

3 Insert the batteries into the remote

2. Installing the Windows driver software

NOTE: Mac users will use the built-in driver software. No installation is required.

1 Download the dedicated driver from the "Download" section of the HD-AMP1 page of the Marantz website (http://www.marantz.com/pages/home.aspx) onto your PC.

2 Unzip the downloaded file, and double-click the exe file.

3 Install the driver.

① Select the language to use for the installation.

② Click "OK".
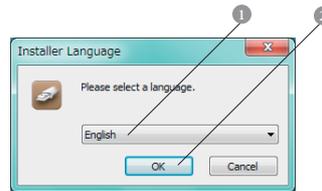
③ The wizard menu is displayed. Follow the instructions on the screen.

④ When the wizard is completed, click "Yes".

Basic trouble shooting

- The driver software cannot be installed correctly if your PC is connected to the unit by a USB cable.
- If the unit and your computer are connected by a USB cable and the computer is switched on before installation, disconnect the USB and restart the computer.
- Please see the FAQ at www.marantz.com if you experience any issues getting audio to play from your computer through the HD-AMP1. You may also want to check the support pages for your audio player application.

3. Enjoying your music!

Enjoying music from your PC or Mac

1 Connect the HD-AMP1 to your PC or Mac using the included USB cable.
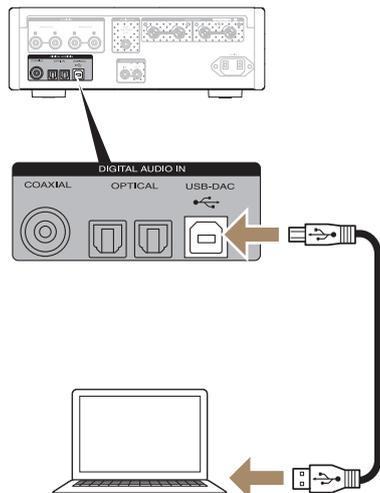
2 Power on.

3 Press the "USB-DAC" button on the remote.
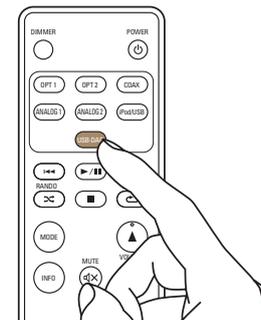
**4** On your PC or Mac, select the HD-AMP1 as the current output device.

System Requirements

- Windows 7 or 8/8.1
- Mac OS X 10.9 or 10.10

1 Click the "Start" button and click "Control Panel" on the PC.

- The control panel setting list is displayed.

2 Click the "Sound" icon.

- The sound menu window is displayed.

3 Make sure under "Playback" tab the "HD-AMP1" is set as "Default Device" indicated by the checkmark.

- When there is a checkmark for a different device, click "HD-AMP1" and "Set Default".

4 Select "HD-AMP1" and click "Properties".

- The Digital Audio Interface Properties window is displayed.
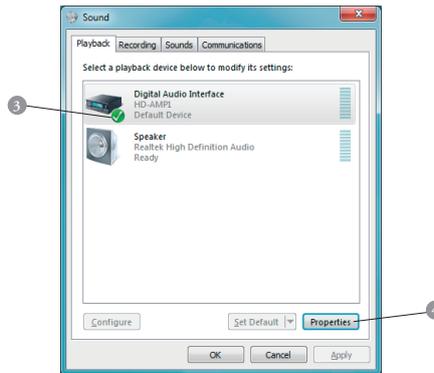

5 Click the "Advanced" tab.

6 Select the sampling rate and bit rate to be applied to the D/A converter.

- It is recommended that "24 bit, 192000 Hz (Studio Quality)" or "32 bit, 192000 Hz (Studio Quality)" is selected.

7 Click "Apply".

8 Click "Test".

- Check that audio is heard from the speakers connected to the HD-AMP1.
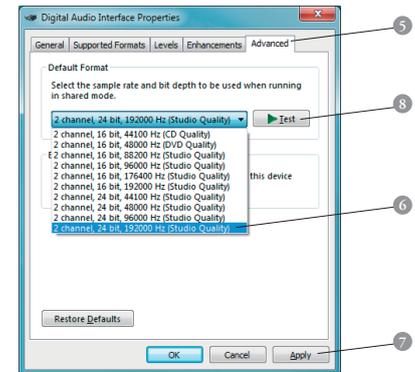
Mac OS X

1 From the Finder, select the Utilities menu item from the Go menu.
• The utility list is displayed.

2 Double-click "Audio MIDI Setup".
• The "Audio Devices" window is displayed.

3 Check that "Use this device for sound output" is checked in "HD-AMP1".
• If a different device is checked, select and "Secondary click" on "HD-AMP1", and then select "Use this device for sound output".
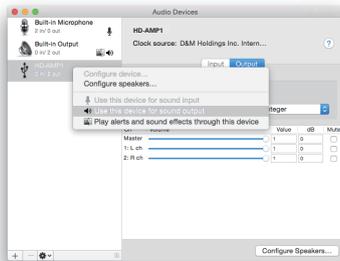
4 Select the "HD-AMP1" format.
• It is normally recommended to set the format to "384000.0 Hz" and "2ch-32 bit Interger".
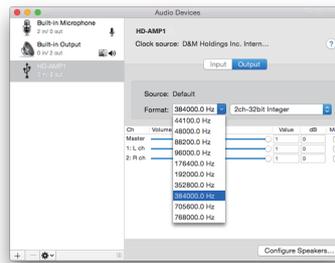
5 Click "Quit Audio MIDI Setup".

5 Use your favorite music applications on your PC/Mac to play audio through the HD-AMP1.
• For high resolution audio playback you will need to obtain an advanced audio player software such as JRiver Media Center or Audirvana.

```
USB-DAC
   192k
```

The sampling frequency
of the music file is displayed.

Note

• Additional settings to output audio to the HD-AMP1 may have to be selected in your advanced audio player application. Please refer to the user's manual for your application.

Enjoying music from your iOS device

1 Connect your iOS device to the USB port on the front of the HD-AMP1 using the cable that came with your iOS device.
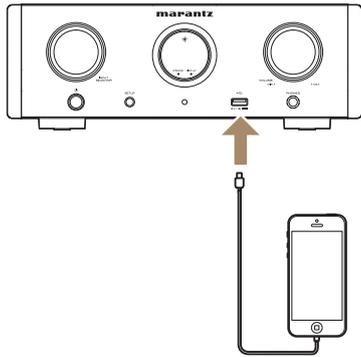
**2** Press the iPod/USB button on the remote.
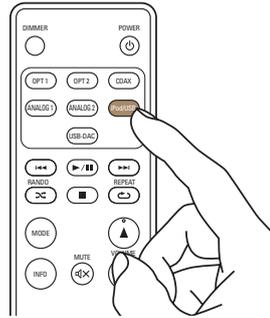
3 Use your favorite music applications on your iOS device to play audio through the HD-AMP1.
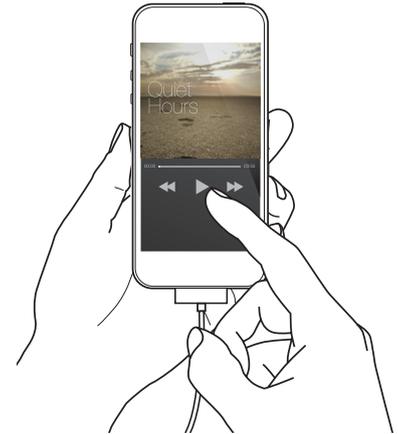
Enjoying music from your USB storage devices

1 Connect your USB storage device to the USB port on the front of the HD-AMP1.
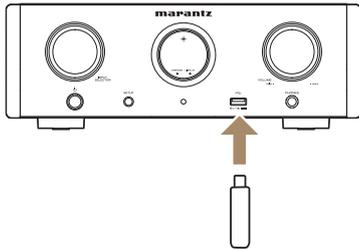
2 Press the iPod/USB button on the remote.
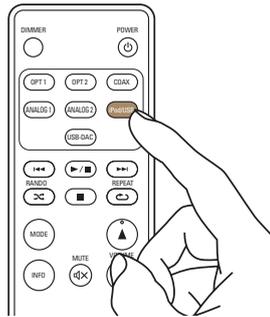
3 After the contents of your device are loaded, use the remote to select something to play.
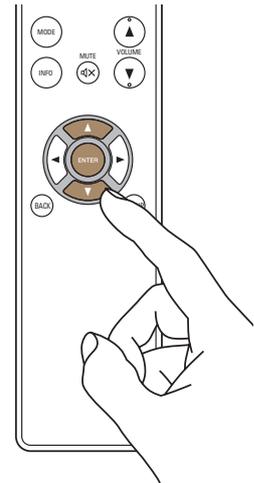
www.marantz.com

You can find your nearest authorized distributor or dealer on our website.

marantz ® is a registered trademark.